


17, rue Ernest Laval - BP35 - 92173 Vanves Cedex France
Tél : 33 (0) 1 41 08 15 15 - télex 634 129 F - Fax : 33 (0) 1 41 08 15 00
Internet : www.pcmpompes.com Email : pcm@pcmpompes.com




Accessories ----- Hygienic Stator Security System SSS

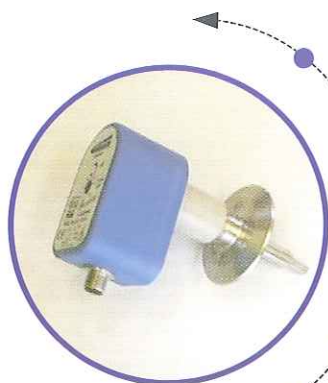

- Dry running protection with relay output
- For assembly on 1" to 4" stainless steel piping
- Pre-set threshold at 10cm/s (re-adjustable)
- Quick answer
- Start management (patented)
- Fault management (patented)
- Easy plug on frequency inverters

Possibilities

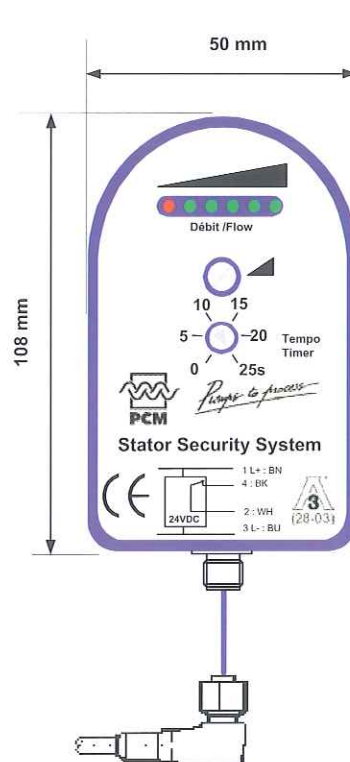

Connection : **SMS, DIN or CLAMP** on vertical suction pipe

Protection : **IP67**

Material : - connection : 316 stainless steel

- Housing : plastic

Electrical connection : **M12x1 plug**

Power supply: **24VDC I<100mA**

Electrical output: **2A 230VAC / 60VDC**

Threshold: **Adjustable**


Time range for start and fault management: **0 to 25s**

Fluid temperature : - **20°C to 80°C**




maxi : **95°C during 180mn**

120°C during 120mn




Ambient temperature : - **20°C to 60°C**

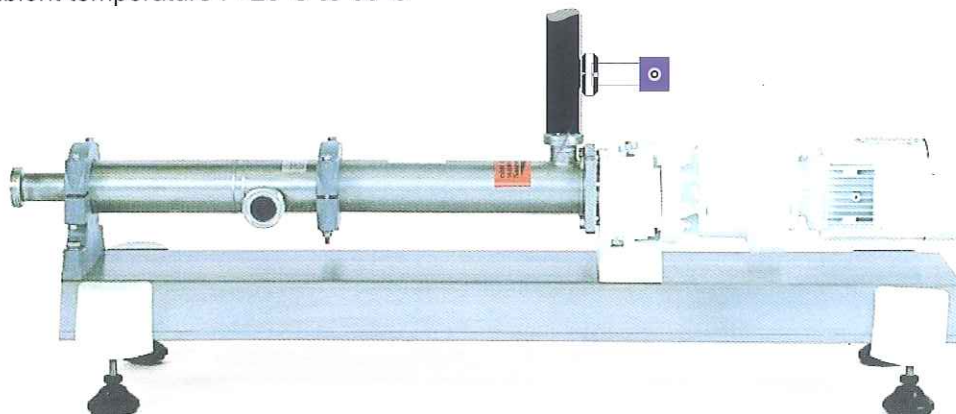

AF AQ
N°1994/2612a

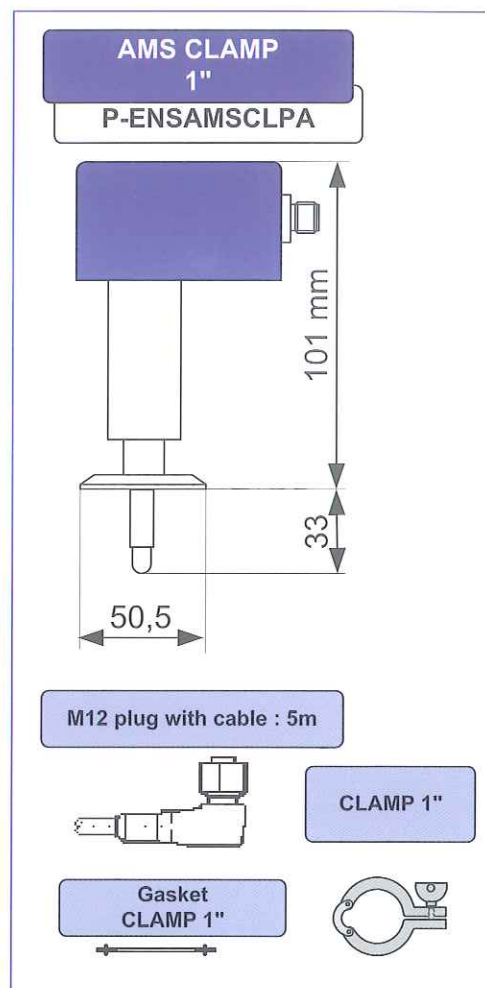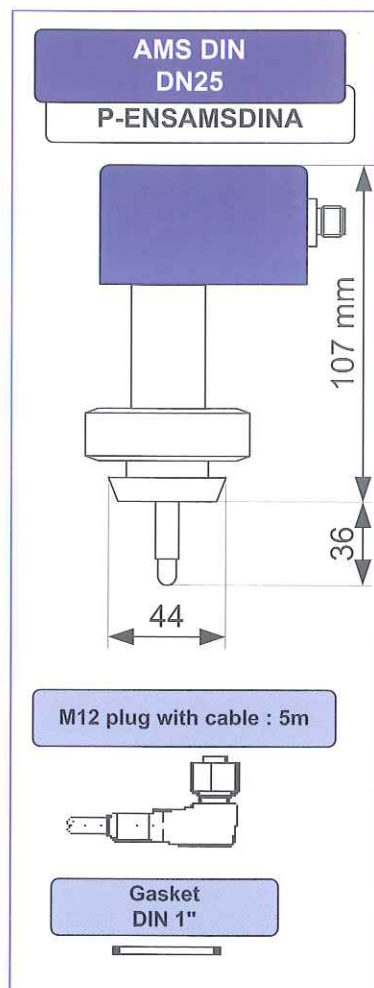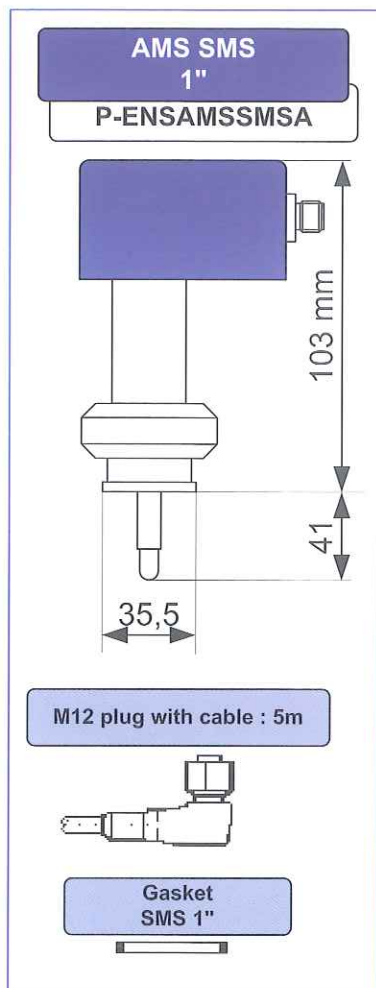

For assembly on
1" & 1"1/2 piping

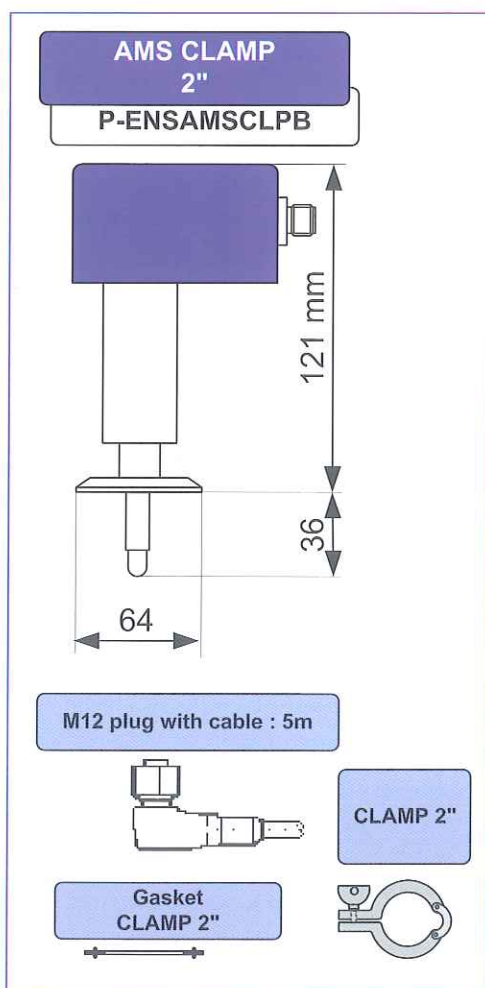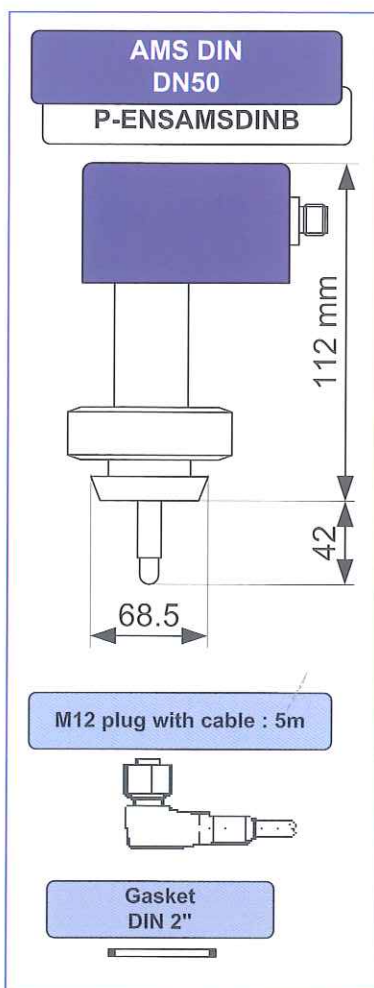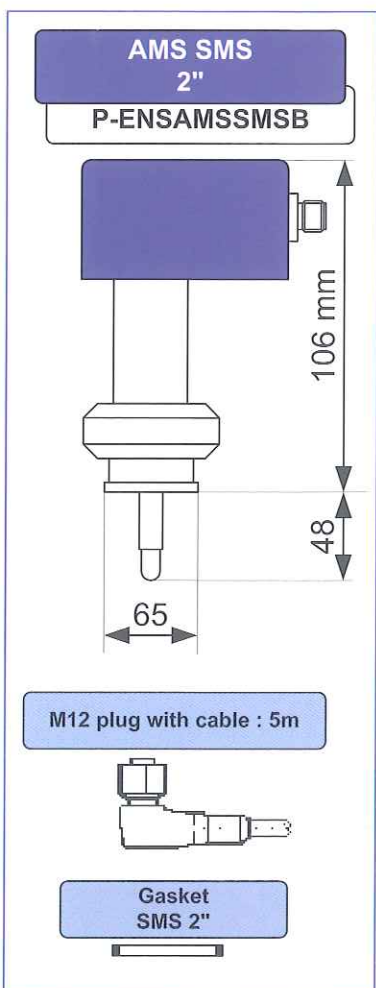

For assembly on
2" , 2"1/2, 3" & 4" piping