


Accessories ----- Industrial Stator Security System - AMS



- Dry running protection with relay output*
- Pre-set threshold at 10cm/s (re-adjustable)*
- Easy plug on frequency inverters*
- Start management (patented)*
- Fault management (patented)*

Possibilities

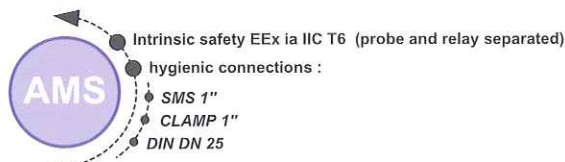

- Pressure connection : **1/2"BSP on suction pipe**
- Protection : **IP67**
- Materials : **Connection : 316Ti stainless steel**
- Housing : plastic
- Electric connection : **M12x1 plug**
- Power supply : **24VDC I<100mA**
- Electric output: **2A / 230VAC ou 60VDC**
- Threshold: **Pre-set at 10cm/s and re-adjustable**
- Time range for start and fault management: **0 to 25s**
- Fluid temperature : **-20°C to 80°C**
- Ambient temperature : **-20°C to 70°C**

