



improving your process


PCM Equipement

17, rue Ernest Laval - BP35 - 92173 Vanves Cedex France
Tél : + 33 (0) 1 41 08 15 15 - télex 634 129 F - Fax : + 33 (0) 1 41 08 15 00
Internet : www.pcmpompes.com Email : pcm@pcmpompes.com




888

Accessories ----- Combined Pressure Hygienic Sensor

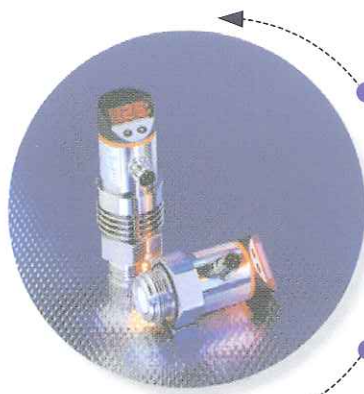

- Viscous media and obstructing fluid compatibility
- Cleaning in place
- 3A & EHEDG
- 7-segment led display
- Output 1 : Threshold for overpressure or underpressure protection
- Output 2 : Threshold or analogic

- Pressure connection : **SMS, DIN, CLAMP** or welding on discharge pipe
- Protection : **IP67**
- Materials: **Housing** : 316L stainless steel
Diaphragm : Ceramic
- Max temperature: **125°C**
145°C during 1h
- Electric connection : **M12x1 plug**
- Power supply : **24VDC I<60mA**
- Pressure range : **-1 to 25b**
- Output 1 : **NPN or PNP adjustable**
- Output 2 : **NPN or PNP or analogic configurable**




M12 plug without cable
C05044Z000

M12 plug with cable : 5m
C05044E010

Options

Hygienic sensors

Contact PCM for other connections

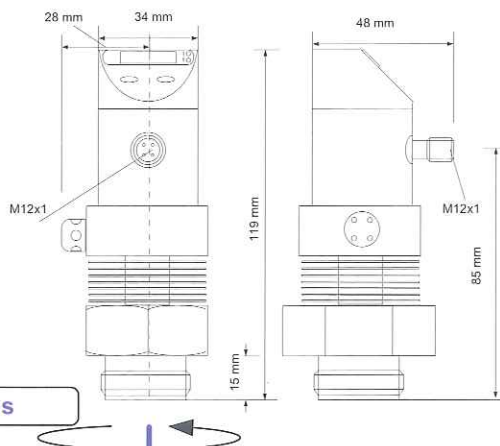

Hygienic sensor with 316L stainteel steel adaptator SMS 38
Ref C12040F000

Hygienic sensor with 316L stainteel steel adaptator DIN 40
Ref C12040J000

Hygienic sensor with 316L stainteel steel adaptator CLAMP 25
Ref C12040B000

Hygieni : sensor with 316L stainteel steel adaptator to weld
Ref C12040A000

