




improving your process


PCM Equipement

17, rue Ernest Laval - BP35 - 92173 Vanves Cedex France
Tél : + 33 (0) 1 41 08 15 15 - télex 634 129 F - Fax : + 33 (0) 1 41 08 15 00
Internet : www.pcmpompes.com Email : pcm@pcmpompes.com



888

Accessories ----- Combined Pressure Industrial Sensor

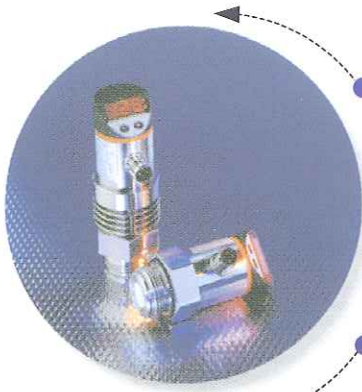

- Viscous media and obstructing fluid compatibility
- Cleaning in place
- 3A & EHEDG
- 7-segment led display
- Output 1 : Threshold for overpressure or underpressure protection
- Output 2 : Threshold or analogic

- Pressure connection : 3/4" BSP, SMS, DIN, CLAMP or welding
on discharge pipe

- Protection : IP67

- Materials: Housing : 316L stainless steel
Diaphragm : Ceramic

- Max temperature: 80°C


- Electric connection : M12x1 plug

- Power supply : 24VDC I<60mA

- Pressure range : -1 to 25b

- Output 1 : NPN or PNP adjustable

- Output 2 : NPN or PNP or analogic configurable

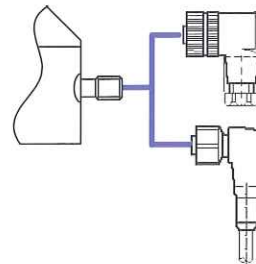


M12 plug without cable

C05044Z000

M12 plug with cable : 5m

C05044E010

Options

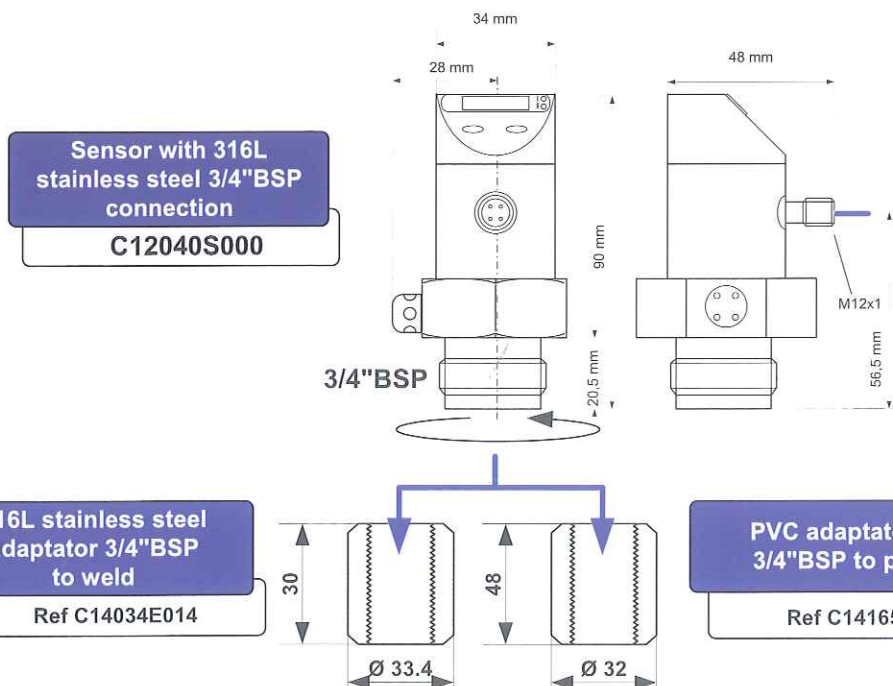

Sensor with 316L
stainless steel 3/4" BSP
connection

C12040S000

316L stainless steel
adaptor 3/4" BSP
to weld

Ref C14034E014

PVC adaptor 32
3/4" BSP to paste

Ref C14165E080